



FEEL THE SW
DIFFERENCE®

DURABILITY THAT'S ON CALL FOR THE TOUGHEST OF JOBS.



MegaMan®

MM-11BK

POWDER-FREE ECOTEK SUSTAINABLE
EXAMINATION GLOVES WITH MOISTURE-
WICKING DRI TEK TECHNOLOGY


SWEAT MANAGEMENT AND ANSI LEVEL 3 ABRASION RESISTANCE FOR THE ULTIMATE IN COMFORT AND PERFORMANCE

- DriTek® Comfort Technology with absorbent lining wicks away moisture for all day comfort
- EcoTek® Sustainable Technology*
- ANSI/EN Level 3 abrasion resistance for durability and extended wear
- Fully textured surface for excellent grip
- 1.5 AQL exceeds laboratory standards
- Up to 3x longer lasting than standard nitrile gloves
- SHA Dermatologically Approved
- UL NFPA 1999 Certified

ANSI/EN level 3
abrasion resistance

Fully textured
surface for wet
and dry grip

Tear-resistant
beaded cuff for
easy donning

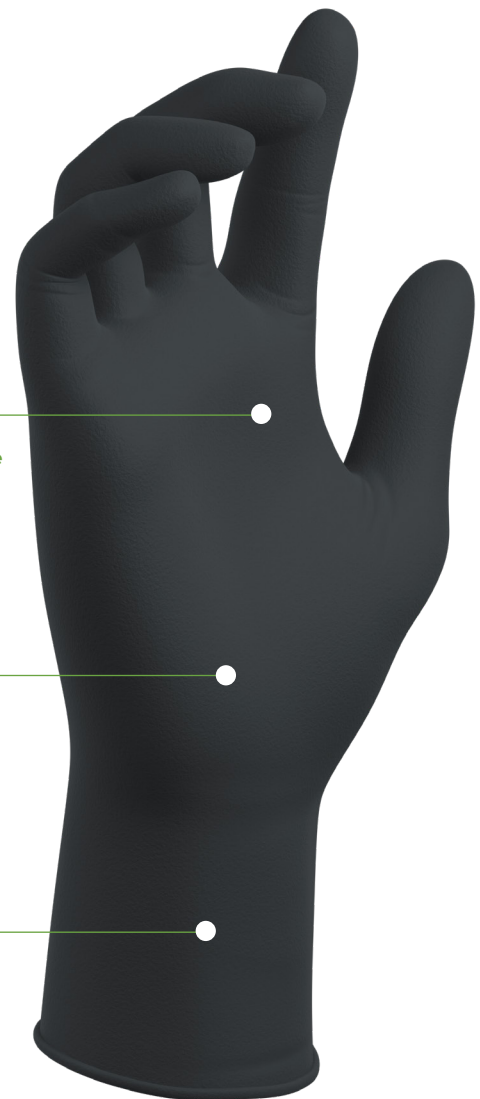

MM

MM-11BK

WEIGHT

12.8g

(large size)

LENGTH

11"

THICKNESS

8.5 mil

FEATURES

DriTek®
EcoTek®

COLOR

BLACK

EcoTek



Feel the
difference.™

SW®

33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2024 SW. All rights reserved.



WOMEN
OWNED



TECHNICAL DATA



MM-11BK

POWDER-FREE ECOTEK SUSTAINABLE
EXAMINATION GLOVES WITH MOISTURE-
WICKING DRITEK TECHNOLOGY

PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	MegaMan®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS FINGER	10.1mil 0.26mm
PALM	8.5mil 0.22mm
CUFF	7.0mil 0.18mm
COLOR	Black
SURFACE OUTER	Fully Textured
INNER	DriTek®
LENGTH	11" 280mm
WEIGHT	12.8g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China/Malaysia

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	17 MPa	16 MPa
ELONGATION:	560%	520%

INTEGRATED TECHNOLOGIES

DRITEK Comfort Technology:
Advanced flock lining is a powder-free, soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

100% Air Inspected



* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006

EU 2016/425
ANSI/ISEA 105-2016
CAT III Complex Design
FDA 21 CFR 177.2600



Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260881	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
N260882	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
N260883	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
N260884	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
N260885	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260886	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case
N260887	3XL 11½ – 12	5.3" 134mm	50 gloves per box 10 boxes per case

APPLICATIONS

For Medical Use
Chemical Handling
First Responder EMS

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N26088X0323



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2024 SW. All rights reserved.



*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.